

VSM08 SERIES



VSM0809



应用领域 Application

数码相机、网络视频、安防监控设备、CCTV镜头、IT产业、精密仪器

Digital cameras, network video, security monitoring equipment, CCTV lens, IT industry, precision instruments


型号 ITEM NUMBER	额定电压 RATED VOLTAGE	电阻 RESISTANCE	驱动方式 DRIVE MODE	步距角 STEP ANGLE	最大自启动周波数 MAX. SELF-START FREQUENCY	最大连续响应周波数 MAX CONTINUOUS RESPONSE FREQUENCY	引入力矩 INTRODUCING TORQUE	脱出力矩 TRIPPING TORQUE
VSM0809	3.3V	20 ±10%Ω	2-2	18°	800 PPS(min)	2000 PPS(min)	1.5gf-cm(min)	2.0gf-cm(min)
VSM08107	3.3V	40 ±10%Ω	2-2	18°	1000 PPS(min)	1200 PPS(min)	0.8gf-cm(min)	1.0gf-cm(min)
VSM08162	5.0V	50 ±10%Ω	2-2	18°	800 PPS(min)	2000 PPS(min)	0.8gf-cm(min)	1.2gf-cm(min)

规格参考 Specification

CONNECTION DIAGRAM



PITCH	0.4
方向	右旋单螺纹
单一PITCH误差	0.005以下
累积PITCH误差	0.008以下

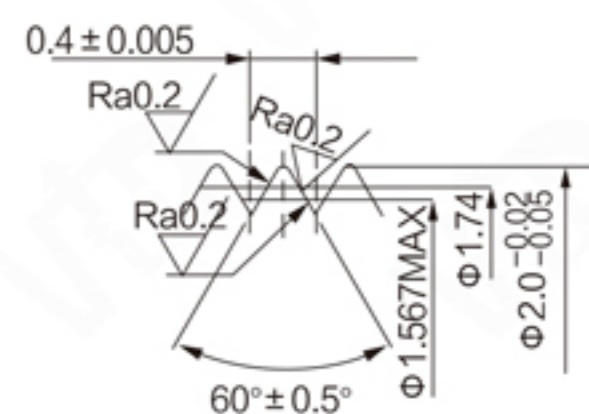

SEQUENCE OF EXCITATION				
STEP PHASE	1	2	3	4
A	+	+	-	-
\bar{A}	-	-	+	+
B	-	+	+	-
\bar{B}	+	-	-	+

OUTPUT SHAFT ROTATION CW

